IRON WIRE









STRAIGHT CUT WIRE

U TYPE WIRE

ANNEALED/GALVANIZEDIRONWIRE

BAR TIE WIRE

















Barbed Wire








Material	High quality low carbon steel wire (galvanized, plastic- coated, plastic- sprayed), PVC wire with the color of blue, green, yellow, etc.					
weaving and characteristics		Be woven into product;fastness and good appearance.				
usefulness			•	way and highway.		
wire gauge	Approximate	Length per Kilo	in Meter			
	Barbs	Barbs	Barbs	Barbs		
B.W.G.	Spacing 3"	Spacing 4"	Spacing 5"	Spacing 6"		
12x12	6.0617	6.759	7.27	7.6376		
12x14	7.3335	7.9051	8.3015	8.5741		
12-1/2x12-1/2	6.9223	7.719	8.3022	8.7221		
12-1/2x14	8.1096	8.814	9.2242	9.562		
13x13	7.9808	8.899	9.5721	10.0553		
13x14	8.8448	9.6899	10.2923	10.7146		
13-1/2x14	9.6079	10.6134	11.4705	11.8553		
14x14	10.4569	10.4569 11.659 12.5423 13				
14-1/2x14-1/2	11.9875 13.3671 14.3781 15.1034					
15x15	13.8927	15.4942	16.6666	17.507		
15x1/2x15 1/2	15.3491	17.1144	18.406	19.3386		





RAZOR WIRE

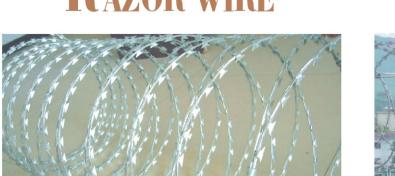



Blade sp	Blade shape	Thickness	Wire Dia	Barb Length	Barb Width	Barb Spacing
BTO-10		0.5 ± 0.05	2.5 ± 0.1	10 ± 1	13 ± 1	26 ± 1
BTO-15		0.5 ± 0.05	2.5 ± 0.1	15 ± 1	15 ± 1	33 ± 1
BTO-22	Lenght Width	0.5 ± 0.05	2.5 ± 0.1	22 ± 1	15 ± 1	34 ± 1
CBT-65		0.5 ± 0.05	2.5 ± 0.1	65 ± 2	21 ± 1	100 ± 2

ROLLED FLOWER BORDERS

Description

- ★ Scroll & Packet Top borders are a perennial favorite for enhancing and protecting flower gardens.
- ★ Selfstaking feature allows for quick and easy set-up.
- ★ Unique, decorative wire pattern.
- ★ Viny I coated to ensure lasting beauty and long life.
- * Available in white and green

Available size:

Mesh/mm	Height/m	Length/m
90×150	0. 4	10/25
90x150	0. 65	10/25
90×150	0. 9	10/25
90×150	1. 2	10/25






Mesh		Wire Gauge	Width	Length
Inch	ММ	BWG		
1/2"	13mm	25,24,23,22,21,20		
5/8"	16mm	27,26,25,24,23,22,		
3/4"	19mm	25,24,23,22,21,20,19		5'-150'
1"	25mm	25,24,23,22,21,20,19,18	24"-72"	
1 1/4"	32mm	22,21,20,19,18	24 -12	3-130
1 1/2"	40mm	22,21,20,19,18,17,16,15,14		
2"	50mm	21,20,19,18,17,16		
3"	75mm	21,20,19,18,17,16,15,14		
4"	100mm	18,17,16,15,14		


Electro Glavanized before Weaving.

Hot Dipped Galvanized before Weaving.

Hot Dipped Galvanized after Weaving.

PVC Coated.









RABBIT MESH & DOG MESH

MESH

GALV. RABBIT MESH

WIRE THICKNESS	MESH SIZE	WIDTH	LENGTH
1.6MM	1"/2"/4"x4"	28"	50'
2.5MM	1"/2"/4"x4"	40"	50'

GALV. DOG MESH

WIRE THICKNESS	MESH SIZE	WIDTH	LENGTH
2.0MM	3"/4"/5"/6"x6"	1.2-1.8m	10m-30m
2.5MM	3"/4"/5"/6"x6"	1.2-1.8m	10m-30m

WIRE THICKNESS	WIDTH		LENGTH	
2.0MM	3"/4"/5"/6"x6"	1.2-1.8m	10m-30m	
2.5MM	3"/4"/5"/6"x6"	1.2-1.8m	10m-30m	

Welding Wire Mesh

Me	esh	Wire Gauge		
Inch MM		BWG		
1/4"x1/4"	6.5x6.5mm	25,24,23,22		
3/8"x3/8"	10x10mm	22,21,20,19		
1/2"x1/2"	13x13mm	24,23,22,21,20,19,18,17,16		
5/8"x5/8"	16x16mm	21,20,19,18		
3/4"x3/4"	19x19mm	21,20,19,18,17,16		
1"x1"	25x25mm	20,19,18,17,16,15,14,		
1 1/2"x1 1/2"	38x38mm	19,18,17,16,15,14		
1"x1/2"	25x13mm	21,20,19,18,17,16		
1"x2"	25x50mm	19,18,17,16,15,14		
2"x2"	50x50mm	18,17,16,15,14,12		
2"x3"	50x75mm	18,17,16,15,14,12		
2"x4"	50x100mm	18,17,16,		
3"x3"	75x75mm	16,15,14,12		
4"x4"	100x100mm	16,14,12		


Electro Glavanized before Welding.

Electro Glavanized after Welding.

Hot Dipped Galvanized before Welding.


Hot Dipped Galvanized after Welding.


PVC Coated.

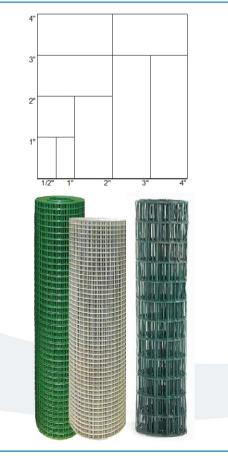

STEEL FRAME LATTICE

- * Steel grating is in accordance with certain spacing and bar (twisted steel, square steel, round steel, flat steel, etc.) with a flat cross-aligned and welded into the middle of a square lattice of steel products.
- ★ Steel grid moderators use to do drain cover, steel platform boards, ladders stepping board. After crossbar commonly used twisted square steel. Steel grating commonly used carbon steel, hot dip galvanized appearance, can play role in preventing oxidation. Can also be made of stainless steel. Steel grating with ventilation, lighting, cooling, slip-proof properties.
- ★ Size as your requirement,
- * Surface treatment can supplied Self-color, Electro-galvanised or Hot dipped galvanised.




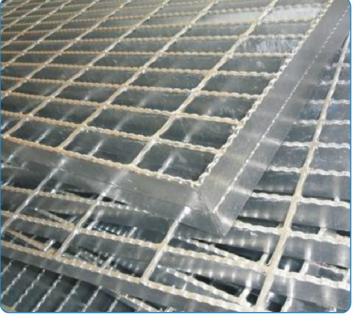

MESH


Expanded Mesh

usefulness Be	e broadly use	ed in bridge, s	safe-guardi	ng for the ma	chine and ot	her fields	Г
plate	hole	hole	mesh	mesh	mesh	weight	
thickness(mm)	width(mm)	length(mm)	peduncle	length(mm)	width(mm)	(kg/m2)	
0.5	2.5	4.5	0.5	1	0.5	1.8	
0.5	10	25	0.5	2	0.6	0.73	
0.6	10	25	1	2	0.6	1	
8.0	10	25	1	2	0.6	1.25	
1	10	25	1.1	2	0.6	1.77	
1	15	40	1.5	4	2	1.85	
1.2	10	25	1.1	4	2	2.21	
1.2	15	40	1.5	4	2	2.3	
1.5	15	40	1.5	4	1.8	2.77	
1.5	23	60	2.6	3.6	2	2.77	
2	18	50	2.1	4	2	3.69	
2	22	60	2.6	4	2	3.69	
3	40	80	3.8	4	2	5	
4	50	100	4	2	2	11.15	
4.5	50	100	5	2.7	2	11.15	
5	50	100	5	2.6	1.4	12.39	
6	50	100	6	2.5	2	17.35	
8	50	100	8	2.1	2	28.26	



Square Wire Mesh

3*3mesh	0.60-1.60mm
4*4mesh	0.56-1.20 mm
5*5mesh	0.50-1.00mm
6*6mesh	0.45-0.90mm
8*8mesh	0.35-0.80mm
10*10mesh	0.25-0.60 mm
12*12mesh	0.18-0.56 mm



Window Screen Netting

14x14mesh	
16x14mesh	
18x16mesh	
width 0.6-1.8m available	э_

PVC & fiber glass window netting Plastic window netting

Aluminium window netting Galvanized window netting



PVC & Glass Fibre



Galv. & Enamelled Window Netting



FARM FENCE



DEER FENCE

Field fence is essential to feed sheep horse in agriculture farm and grassland also as barriers against deer and wild animals.


Ideal for farm fencing, land barriers, erosion control and live stock fencing. Crimp allows fence to expand and contract in the summer and winter months.

Vertical spacing: 6" or 12"







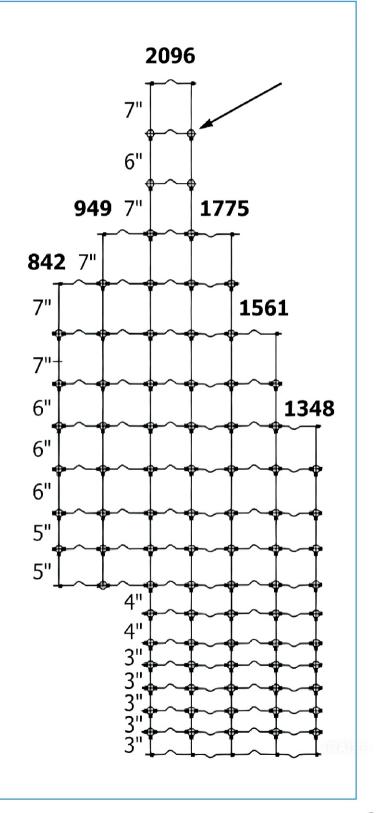


FARM FENCE


FIELD FENCE

Field fence is essential to feed sheep horse in agriculture farm and grassland also as barriers against deer and wild animals.

deal for farm fencing, land barriers, erosion control and live stock fencing Crimp allows fence to expand and contract in the summer and winter months Vertical spacing: 6" or 12"





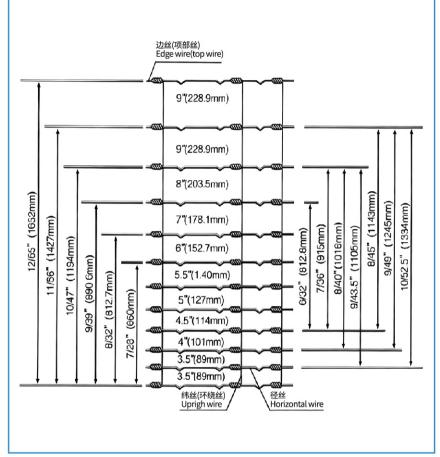

HORSE FENCE



The knotted junctions prevent this woven wire fence from buckling or sagging, especially on uneven terrain, and add additional strength to the fence system. Knots in the wire fence allows for expansion and contraction during the summer and winter months, and also allows the fence to have some "give" when animals or children brush up against the fence.

Mesh		Wire Cause	Width	Longth	
Inch	ММ	Wire Gauge	vviatri	Length	
2"x4"	50x100mm	10 10 5 10 14			
4"x4"	100x100mm	12,12.5,13,14	4'-6'	50'-200'	
2"x2"	50x50mm	16			





STUDDEDT POST

MEASUREMENT	SPEC	Length					
Light Duty	0.95lb/ft	5'	5.5'	6'	6.5	7'	8'
Medium Duty	1.25lb/ft	5'	5.5'	6'	6.5	7'	8'
Heavy Duty	1.33lb/ft	5'	5.5'	6'	6.5	7'	8'



PUCHED T POST






MEASUREMENT	SPEC	Length					
Light Duty	0.95lb/ft	5'	5.5'	6'	6.5'	7'	8'
Medium Duty	1.25lb/ft	5'	5.5'	6'	6.5	7'	8'
Heavy Duty	1.33lb/ft	5'	5.5'	6'	6.5'	7'	8

U POST





U POST					
MEAS	Length				
Light Duty	3'	4'	5'	6 '	
Heavy Duty	5'	6 '	7'		

ELECTRIC FENCE POST

Step-In Post, Plastic	48"
Light weight and Sturdy, Step In Fence Posts are ideal for detting up and taking down temporary fencing. Eight	
molded clips hold fencing right where it is needed. A heavy duty steel stake located at the bottom of the fence post	
makes stepping the post in to the ground very easy. An anti rotation spike is built in to the step to help maintain the	ĺ
desired alignment.	ĺ

Step-In Post, Galvanized Steel 48"

This 5/16" x 4' Steel Garden Post is a great option for gardens and stabilizing young plants and trees, to help them as they become established. This post features an 189-gauge double spot welded anchor plate. Many uses for this post around the home and farm.

Pig Tail Step-in Post

The 34in post driver is used to install force II Posts and T Posts with sees. The post driver feetures two headles on

The 24in post driver is used to install fence U-Posts and T-Posts with ease. The post driver features two handles on both sides of the driver making it is easy to maneuver. Post driver makes installing U-Posts and T-Posts easy, simply place post driver over post and lift and release the driver until post is at desired depth in the ground.



Fence Post Driver

Fence Post Driver

The 24in post driver is used to install fence U-Posts and T-Posts with ease. The post driver features two handles on both sides of the driver making it is easy to maneuver. Post driver makes installing U-Posts and T-Posts easy, simply place post driver over post and lift and release the driver until post is at desired depth in the ground.

Post Puller



EARTH ANCHORS

Size	0	٩
Size	Ī	
3"x15"		
3"x30"		
4"x40"		ĺ
6"x48"	+	4

CHAIN LINK FENCE


Chain Link Fabric



Me	esh	Wire Gauge	Width	Length	
Inch	MM	BWG	vviatri		
1 1/2"	38mm	9,11,12.5			
2"	51mm	6,9,11,12.5			
2 1/4"	57mm	6,9,11,12.5			
2 3/8"	60mm	6,9,11,12.5	36"-96"	50'-200'	
2 1/2"	64mm	6,9,11,12.5			
3"	76mm	6,9,11,12.5			
4"	102mm	6,9,11,12.5			

Hot Dipped Galvanized Wire PVC Coated Wire

Edge Type

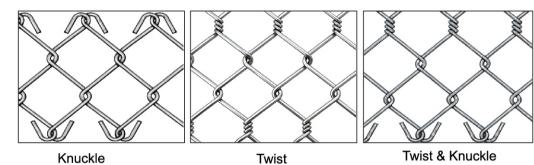


Chain link framework





Chainlink Fence Round Post	
Surface: Galvanized / Galvanized Aluminum /	Г
Powder Coated	Г
Towasi Soulou	Г
	Г

	O.D (inch)	Thickness (inch)	Length(ft)
	1-1/4"	0.05"(18ga)	3-24'
	1-1/2"	0.05"(18ga)	3-24'
496	1-5/8"	0.05"(18ga)	3-24'
st	1-7/8"	0.05"(18ga)	3-24'
	2-3/8"	0.05"(18ga)	3-24'
	1-11/16"	0.1" / 0.14"	3-24'
	2-3/8"	0.1" / 0.154"	3-24'
	3-1/2"	0.12" / 0.216"	3-24'
	4-1/2"	0.237"	3-24'
	6-5/8"	0.28"	3-24'
	4-1/2"	0.237"	



Fence Square Picket Surface: Galvanized / Galvanized Aluminum Powder Coated

	O.D (inch)	Thickness (inch)	Length(ft)
	5/8" x 5/8"	0.05"(18ga)	3-24'
	3/4" x 1-1/2"	0.06"(16ga)	3-24'
	1" x 1"	0.06"(16ga)	3-24'
/	1-1/2" x 1-1/2"	0.075"(14ga)	3-24'
	2" x 2"	0.075"(14ga)	3-24'
	2-1/2" x 2-1/2"	0.075"(14ga)	3-24'
	3" x 3"	0.075"(14ga)	3-24'

HAIN LINK FENCE



Chain Link Fittings

POST CAP

LOOP CAP

RAIL ENDS



BRACE BANDS











TENSION BARS

HOG RINGS

LINE RAIL CLAMPS

END RAIL CLAMPS BARB WIRE ARMS











FENCE TIES



FORK LATCH



COLLAR



Floor Flanges



MALE HINGES

FEMALE HINGES



BOX HINGES



POLYMER GATE ROLLERS



INDUSTRIAL LOCKING DEVICE




AUTO POOL LATCH

WOOD TO STEEL ADAPTER



CHAIN LINK FENCE

Chain Link Gate





Opening	filling size
42"x39"	
42"x48"	
42"x60"	11gax1.5"
42"x72"	11gax2"
48"x39"	9gax1.5"
48"X48"	9gax2"
48"x60"	
48"x72"	

Chain Link Kennels





	Filling Size			
Size	WELDED WIRE TYPE	CHAIN LINK MESH TYPE		
6'x4'x4'				
6'x4'x8'	2"x2"	11gax1.5"		
6'x10'x10'	2"x4"	11gax2"		
6'x5'x5'	2"x8"	9gax1.5"		
6'x25'x10'	3"x6"	9gax2"		
6'x10'x5'				

CHAIN LINK FENCE



Metal kennels





Kenel Panel

		Filling Size		
Size	welded wire type	chain link mesh type		
4'x5' 6'x5' 6'x10'	2"x2" 2"x4" 2"x8" 3"x6"	11gax1.5" 11gax2" 9gax1.5" 9gax2"		-1.

CHAIN LINK FENCE

Metal kennels

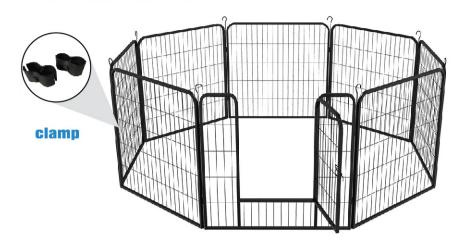

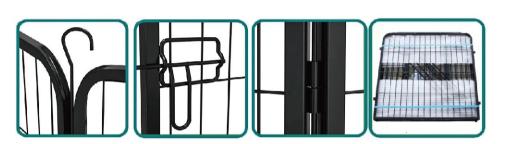


Item Name	Pet Fence
	80*60 cm 8 panels
	80*60 cm 16 panels
	70*80 cm 8 panels
W O'	70*80 cm 16panels
Item Size	80*80 cm 8panels
	80*80 cm 16 panels
	80*100 cm 8 panels
	80*100cm 16panels
Material	Metal
Color	Black
Custom Service	Design, logo, and packaging can be customized


ADJUSTABLE SHAPES




4 PCS Gate(1)-WaLL(3)




8 PCS Gate(1)-WaLL(7) Circula



5 PCS Gate(1)-WaLL(4)



8 PCS Gate(1)-WaLL(7)

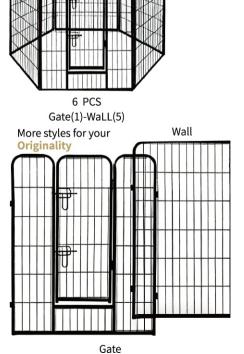


CHAIN LINK FENCE

Temporary Fence



Panel size	6x10ft 6x9.6ft 4x8ft 6x8ft 8x10ft
ranei size	0X 1011 0X3.011 4X011 0X011 0X 1011
Wire diameter	3mm,3.2mm
Opening	50*100mm, 60*150mm,100*200mm
Framepipes	20*20mm, 25*25mm, 30*30mm
Frame pipe	1.2mm.1.5mm.2mm
thickness	1.211111, 1.311111,211111
Middle pipe	20*20mm,25*25mm
Middle pipe	1mm,1.2mm
thickness	1111111, 1.2111111
Surface	pow der painted, PV C coated, galvanized
treatment	pow dei painted, i v occated, galvanized



Fence w idth/length	8ft, 10ft, 12ft, 14ft, etc	
Wire diameter	2.7mm, 2.5mm, 3mm, 3.5mmetc.	
Chain link mesh size	57x57mm(2-1/4"), 50x50mm,60x60mm,etc.	
Frame tube OD	33.4 mm (1-3/8"), $32 mm$, or $42 mm (1-5/8")$ w ith $0.065"$ w all thickness	
Vertical/cross brace tube	25mmor 32mmw ith 1.6mm(0.065") w all thickness	
Fence base/stand	610x590mm, 762x460mm, etc	
Accessories	Clamps, base feet, tension wire and tension bar (optional)	
Material	Hot dipped galvanized	
Surface treatment	All joints are welded and sprayed with a galvanized paint to cover any exposed metal	


LINK ACCESSORIES














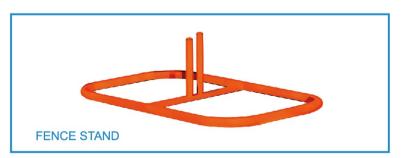


ORNAMENTAL FENCING

Flat Gate










Arched Gate

48 " W x 5' H	Black
48 " W x 4' H	Black
42 " W x 5' H	Black
42 " W x 4' H	Black







Fence Panels

Available Options	Colour
8' W x 6' H	Black
8′ W x 5′ H	Black
8' W x 4' H	Black



Driveway Gates

Arched	
20'W x 72"H	Black
16'W x 72"H	Black
8' W x 60" H	Black
FlatTop	
20'W x 72"H	Black
16′W x 72″H	Black



STEEL PICKET FENCE





Specification

RAIL(mm): 32x32x1.2, 40x40x1.2, 45x45x1.2, 32x32x1.0, 40x40x1.0, 45x45x1.0, etc. Picket(mm): 16x16x1.0, 19x19x1.0, 25x25x1.0, 16x16x0.8, 19x19x0.8, 25x25x0.8, etc

Center(mm): 100, 116, 124, 130, etc.

Post(mm): 50x50x1.5, 60 x60x2.0, 75x75x2.5, etc.









We can offers several fencing solutions to fit your needs. One of our most popular fencing solutions is the steel fence (also known as Steel picket fence and Garrison fencing). This fencing solution is particularly popular for commercial applications as it provides a high level of security at an economical price.

Whether you need a fence for a commercial property, park, or school, look to Fans' steel fences as the ideal solution. Our steel fences offer maximum security, while also providing a lot of cost savings over the lifetime of the fence.

These steel fences are 2100mm tall and made of steel tube. As these are Garrison style fences, they have pressed pointed tips. They give the fence design a feature and they also act as a deterrent as they would be incredibly dangerous and difficult for an intruder to try to climb and enter your premises. Keeping property secured is crucial to prevent damage to your property, theft and authorized access. Keep your employees, customers, products, and information safe with these exceptional steel fences.





EUROPEAN STYLE FENCE

Usual Size: 2.75m width x 2.4~2.7m height Surface treatment: Hot dipped galvanised Powder coating after galvanised

Material: Super quality steel plate Processing: Punched into different models. Surface treatment can be hot dipped zinc plating, plastic spray coating and plastic coating.

Uses: Palisade Fencing is used in fencing, decoration and security facilities for industries, agriculture, city construction and transport.

Features: This kind of fencing product offers good corrosion resistance, age resistance, beautiful view, simple and easy installation.

black RAL9005

grey RAL7037 blue RAL5010

white RAL9010



EUROPEAN FARM DOOR

Usual Size: 1m 1.5m 2m 3m width 2.4~2.7m height

Surface treatment: Hot dipped galvanised









GD-PM01

GD-PM02

GD-PM03 GD-PM04









straight palisade fishplate

corner palisade fishplate

fishplate

green RAL6005

red RAL300

RAL1006

yellow

brown RAL8019

3D CURVED WIRE MESH FENCE

Commercial

1. Characteristic

Panel with bends is not only refinedly and scientific, but also stable and durable. It can reduce the wire's diameter by using the bends, and the fastness of the panel won't be debase, then the cost can be reduced. It also can match with many kinds of post, and it's well suitable for a wide range of application and easy for installation.

2. Range of application

- 1) Road and Transit(Highway, Railway, Road, City Transit)
- 2) Science & Industry Zone (Factory, Industry Zone,
- Sightseeing Zone, New pattern farm)
- 3) Private grounds (Courtyard, Villadom)
- 4) Public grounds(Park, Zoo, Train or Bus station, Lawn)
- 5) Commercial grounds (Corporation, Hotel, Supermaket)

3. High Anti-Corrosion

Using high quality iron rod as raw material, the welded panel, after galvanization, powder primer. And powers top coating, it can resist the corrosive radiation very strongly.

Surface Treatment	Min	Max
Electric Gal	20g/m	60g/m
Hot dipped Gal	35g/m	500g/m
Power sprayed coating	160 microns	240 microns
Pvc/Pe dipped coating	600 microns	1000 microns

4. Design Advantage

The panel is portable, wire size and mesh open can be produced as customer's requests. The ability of resisting the concussion will not be discounted. It is suitable with many kinds of post. It's economy and much more valuable



5. Choice of colors

Every RAL color desired can be delivered, for example the colors corresponding to your corporate design.

Common colors:

Moss green RAL6005 Traffic red RAL3020 Pure white RA9010 Traffic yellow RAL1023 Stone grey RAL7030 Traffic blue RAL5017 Gray RAL7016 Black RAL9005

6. Popular Specification

Wire Dia. 3.5mm 4.0mm 4.5mm 5.0mm 5.5mm 6.0mm Mesh size 100*50mm 100*55mm 150*55mm Panel Width 2.0m 2.255m 2.5m 3.0m

		Post 's height		Post
Panel Height	Fold No	Buried type	Base type	model
800mm	2	1200	900	
1000mm	2	1400	1200	DT 02
1200mm	2	1600	1400	RT-03 Round
1500mm	3	2000	1700	post
1700mm	3	2200	1900	Post
2000mm	4	2500	2200	
830mm	2	1200	900	
1030mm	2	1400	1200	
1230mm	2	1600	1400	
1530mm	3	2000	1700	RT-04
1730mm	3	2200	1900	Square post
1830mm	4	2300	2000	post
2030mm	4	2500	2200	
2230mm	4	2700	2400	
2530mm	5	3000	2600	



2D PANEL FENCE

1. Description

The fence is composed with flawless welded steel post & high strength welded horizontal wire fence; flat & strong panel with high tensile strength, it is a high security fence system, the parts are connected with special way without fittings, high fastening and convenient installation.

2. Range of application

Power station, Commonality construction, Jail, Airport, Military base, Country border and other high security area and place. Extra choose the barbed wire or razor wire fence make more security.

3. High Anti-Corrosion

(Reference 3d curved wire mesh fence)

4. Choice of colors

(Reference 3d curved wire mesh fence)

5. Design Advantage

The design of double wires can stay the destroy. It is suitable for the high security place.



Post

RT-1 PEACH POST				
POST OD. WALL THICKNESS POST LENGT				
70x100mm	1.0mm	L=2.0M		
70x100mm 1.2mm		L=2.5M		
RT-3 ROUND POST				
48mm	1.5mm	L=2.0M		
48mm	2.0mm	L=2.2M		
60mm	1.5mm	L=2.4M		
60mm	2.0mm	L=2.5M		

6. Popular Specification

Wire Dia. 6/5/6mm 8/6/8mm

Mesh size 200x50mm

Panel Width 2.0m 2.2m 2.5m 3.0m

Panel height	Post 's height	Post model	Fitting
630mm	1000mm		
830mm	1200mm	RT-01	No clip; rainhat
1030mm	1400mm	Peach	
1230mm	1600mm	post	
1430mm	1800mm		
1630mm	2000mm		
1830mm	2300mm	RT-04	Steel clip;
2030mm	2500mm	Square post	Plastic clip;
2230mm	2800mm		rainhat
2430mm	3000mm		



RT-4 SQUARE POST				
POST OD.	WALL THICKNESS	POST LENGTH		
40x60mm	1.2mm			
40x60mm	1.5mm	L=2.0M		
40x60mm	2.0mm	L=2.2M		
60x60mm	1.2mm	L=2.4M		
60x60mm	1.5mm	L=2.5M		
60x60	2.0mm			

358 HIGH SECURITY FENCE









The wire fence is composed with square post & high strength welded wire fence, have a strong erosion resistance and anti-ultraviolet; connect by screw flat bar, the installation is very easy and convenient.

2. Range of application

Power station, Commonality construction, Jail, Airport, Military base, Country border and other high security area and place. Extra choose the barbed wire or razor wire fence make more security.

3. High Anti-Corrosion

(Reference 3d curved wire mesh fence)

4. Choice of colors

(Reference 3d curved wire mesh fence)





5. Design Advantage

The design of anti-cutting has a strong body, can delay the destroy and anti-climbing.

6. Popular Specification

Wire Dia. 4mm 3.5mm 3mm Mesh size 12.7x76.2mm(1/2x3")

RT-04 square post 60x60x2mm/2.5mm

Fence height	Panels (mm)	Post length	Fitting
2000mm	2581.6x2010.6	2600mm	
2400mm	2518.6x2417.0	3100mm	
3000mm	2518.6x3001.2	3700mm	
3650mm	2518.6x3674.3	4450mm	Flat bar
4000mm	2518.6x4004.5	4800mm	i iai bai
4700mm	2518.6x4690.3	4700mm	
5300mm	2518.6x5325.3	5390mm	
6000mm	2518.6x6011.1	6050mm	

PILE


PILE







Pile-H

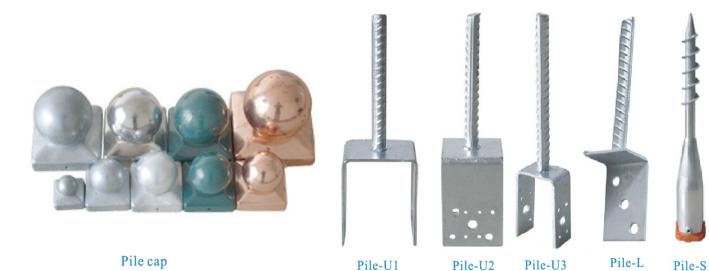



ANIMAL PANEL



CATTLE HEADLOCKS PANEL

Features:

- 1. Easy to operate, only need to operate with 90° rotation, and then press, it can lock and unlock easily.
- 2. Reasonable design, improve the efficiency, a row of cattle crush has two self-locking mechanism, reduce the labor intensity.
- 3. Cow design, arrange cows feeding time properly, we can design different specifications cattle crush according to the months of age, and can increase the production.
- 4. Durable, hot galvanizing layered surface with at least 0.8 mm thickness which is anti corrosion.
- 5. Very flexible, cattle crush can be self-locked in one row, or lock singly, convenient for daily work.



Size:

Square Pipes of Cattle headlock (4 Heads) Size: 2413 x 1016mm 95" * 40"

Weight: 74.3 KGS

Loading Info: 248 SETS / 40HQ Materials: 50*50*2.5mm square tube

Square Pipes of Cattle headlock (5 Heads)

Size : 3022mm x 1016mm Weight : 92.00 KGS

Loading Info: 210 SETS / 40HQ Materials: 50*50*2.5mm square tube

Square Pipes of Cattle headlock (6 Heads)

Size : 3632mm x 1016mm Weight : 110.00 KGS

Loading Info: 210 SETS / 40HQ Materials: 50*50*2.5mm square tube



SHEEP PANEL

Features:

Our sheep yards are easy to install and move. Good quality and surface.

Finish: HDG, powder coated, painting or other by your request

Ellipse pipe can provide enough comfort to the animal.

Smooth welding and strong fabricat Your design acceptable

Size:

Tube size available as following--- 25x25x1.6mm(both bars and frames) or 22x1mm round bars



Pulley



Single bearing, Y Groove GD-HA1Y50 50mm GD-HA1Y60 60mm GD-HA1Y70 70mm GD-HA1Y80 80mm GD-HA1Y90 90mm

GD-HA1Y100 100mm



Single bearing, UGroove GD-HA1U50 50mm GD-HA1U60 60mm GD-HA1U70 70mm GD-HA1U80 80mm GD-HA1U90 90mm GD-HA1U100 100mm



Single bearing, VGroove GD-HA1V50 50mm GD-HA1V60 60mm GD-HA1V70 70mm GD-HA1V80 80mm GD-HA1V90 90mm GD-HA1V100 100mm



Africa type Y/U/V groove can be choosen 45mm 80mm 100mm 60mm 70mm

Trapezoidal triangular pulley

*ALL TYPES WE CAN MADE DOUBLE BEARINGS (GD-HD2xxx), SIZE: 50 60 70 80 85 90 100mm



Single bearing, Y Groove GD-HD1Yxx



Single bearing, U Groove GD-HD1Uxx



Single bearing, V Groove

GD-HD1Vxx Laminated pulley



Single bearing, Y Groove GD-HE1Yxx



Single bearing, U Groove GD-HE1Uxx



Single bearing, V Groove GD-HE1Vxx

Single pulley plus screws

*ALL TYPES WE CAN MADE DOUBLE BEARINGS (GD-HE2xxx), SIZE: 80 90 100 120 140 160 180 200mm



Single bearing, Y Groove



Single bearing, U Groove GD-HF1Uxx *ALL TYPES WE CAN MADE DOUBLE BEARINGS (GD-HF2xxx), SIZE: 50 60 70 80 85 90 100 120 140,,



Single bearing, V Groove GD-HF1Vxx **Double pulley**

WIRE GAUGE



Gage No	S.W.G.	B.W.G	B.&.S.	A.S.W.G.	A.S.W.G.	J. de p	W.G.
	mm	mm	mm	mm	inch	mm	mm
6	4.877	5.156	4.115	4.877	0.192	1.1	1
7	4.47	4.572	3.665	4.496	0.177	1.2	1.12
8	4.046	4.191	3.264	4.115	0.162	1.3	1.2
9	3.658	3.759	2.906	3.767	0.1483	1.4	1.3
10	3.251	3.404	2.588	3.429	0.135	1.5	1.4
11	2.946	3.048	2.304	3.061	0.1205	1.6	1.56
12	2.642	2.769	2.052	2.68	0.1055	1.8	1.66
13	2.337	2.413	1.826	2.324	0.0915	2	1.84
14	2.032	2.108	1.628	2.032	0.08	2.2	2.04
15	1.829	1.829	1.45	1.829	0.072	2.4	2.2
16	1.626	1.651	1.29	1.583	0.0625	2.7	2.4
17	1.422	1.473	1.151	1.372	0.054	3	2.6
18	1.219	1.245	1.024	1.207	0.0475	3.4	2.92
19	1.016	1.067	0.9116	1.041	0.041	3.9	3.4
20	0.9144	0.8886	0.8128	0.8839	0.0348	4.4	3.84
21	0.8128	0.8128	0.7239	0.8052	0.0318	4.9	4.2
22	0.7112	0.7109	0.6426	0.7264	0.0286	5.4	4.65
23	0.6096	0.6347	0.574	0.6553	0.0258	5.9	5.45
24	0.5588	0.5585	0.5105	0.5842	0.023	6.4	5.96
25	0.508	0.5078	0.4547	0.5182	0.0204	7	7
26	0.4572	0.457	0.4039	0.4597	0.0181	7.6	7.6
27	0.4166	0.4062	0.3607	0.4394	0.0173	8.2	8.8
28	0.3759	0.3555	0.32	0.4115	0.0162	8.8	9.4
29	0.3454	0.33	0.2875	0.381	0.015	9.4	10
30	0.315	0.3046	0.254	0.3556	0.014	10	
31	0.2946	0.2539	0.2268	0.3553	0.0132		
32	0.2743	0.2286	0.2019	0.3251	0.0128		
33	0.254	0.2031	0.1798	0.2997	0.0118		
34	0.2337	0.1777	0.16	0.2642	0.0104		
35	0.2134	0.1269	0.1425	0.2413	0.0095		
36	0.193	0.1016	0.127	0.2286	0.009		
37	0.1727	0.1112	0.2159	0.0085			
38	0.1524	0.1006	0.2032	0.008			
39	0.1321	0.0897	0.1905	0.0075			
40	0.1219	0.0897	0.1778	0.007			